

E-PAC™

ALL ELECTRIC VERTICAL L BAR SEALER

CELEBRATING

40
Years

Rennco™
World-Class Packaging Solutions
a division of Pro Mach

Advantages

- All electric - no compressed air
- 110V plug in anywhere convenience
- Servo seal jaw operation
- Servo film feed operation
- User-friendly HMI and programmable changeover
- Quiet operation



Features and Options	E-PAC
Constant Coated Seal System	O
Tri Bar Seal System	S
Low Energy Seal System	N/A
Uptime Seal Jaw	S
Adjustable Jaw Opening	S
Tool-less Film Guides	S
Leg & Height Adjustments	S
Casters	S
Multiple Control Platforms	N/A
Light Screen Cycling Mechanism & Perimeter Interlocked Guarding	S
Jaw Guards	O
Discharge Conveyors	O
Pin Perforator	S
Electric Eye Film Registration	O
Header Sealer	O
Static Eliminator	O
Hole Punch	N/A
Film Cart	N/A
Powered Film Cradle	N/A
Trim Break Detection Eye	N/A
Trim Wind Up	S
Large Trim Wind Up	N/A
Spare Assemblies & Parts Kits	O
Servo Film Feed	S


Key: S=Standard, O=Optional, N/A=Not Applicable

Specifications

Machine Dimensions	46" w x 40" d x 62¼" h (101.6 cm x 116.84 cm x 158.12cm)
Standard Vertical Seal	14" (35.6 cm)
Standard Horizontal Seal	20" (50.8 cm)
Standard Jaw Opening	2" (5.08 cm) to 7" (17.78 cm)
Electrical Requirements	110 v, 60 HZ, 1 ph 12 amps*
Air Requirements	None

*Special electrics available upon request

**CFM will vary depending on added options

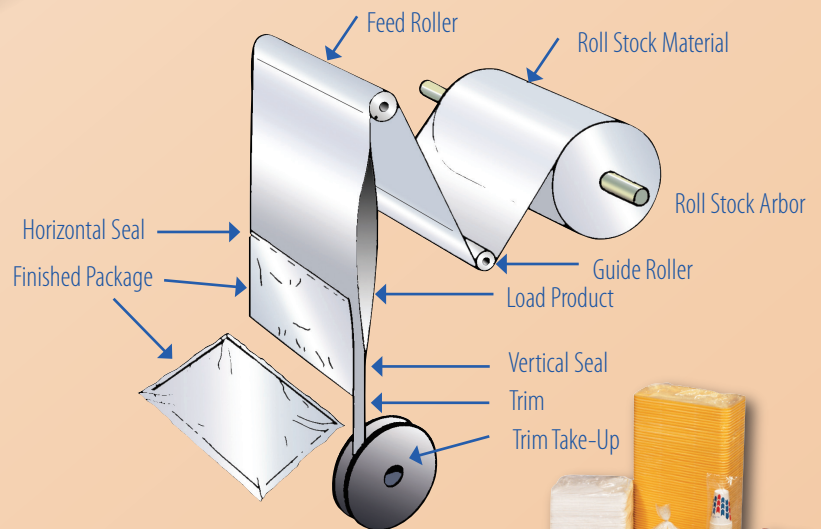

A or B wind material can be used on any of the Rennco vertical models. Bag size changeover is accomplished by simply changing roll stock to the desired width, and adjusting the vertical adjustment wheel or control for different lengths.
Rev 012109

PO Box 116
23721 M-60 West
Homer, MI 49245
USA

www.Rennco.com

Toll-Free: 800-409-5225
International: 517-568-4121
Fax: 517-568-4798
Email: sales@rennco.com

